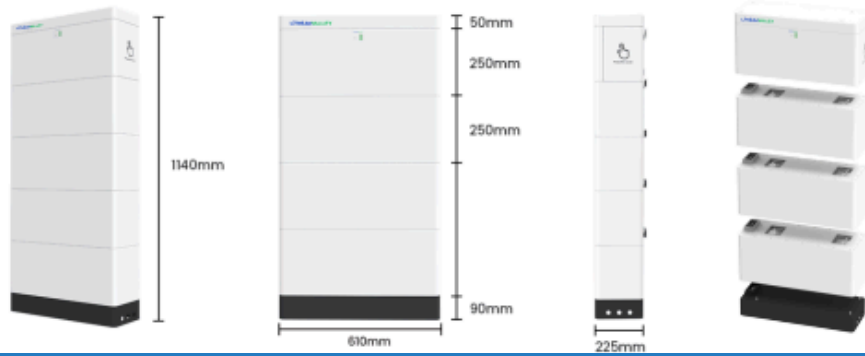






Dimensions



Model	LV-BST-PREPI H5.12Ac			
Model	153.6V100Ah	204.8V100Ah	256V100Ah	307.2V100Ah
Number of layers	3 layers	4 layers	5 layers	6 layers
Picture				
Energy	15.36KWh	20.48Wh	25.6KWh	30.72KWh
Operating Voltage Range	134.4V~168.48V	179.2V~224.64V	224V~280.8V	268.8V~350.4V
Dimension (L*W*H)mm	610*225*1140	610*225*1390	610*225*1640	610*225*1890
Weight(KG)	170	223	276	329
Recommend charge current	50A			
Max continue charge current	100A			
Max continue discharge current	100A			
Display	The information of Battery, such as SOC, battery voltage and so on			
Communication	Support RS485 / CAN			
Maximum parallel support	4 clusters(3 to 6 units per cluster)			
Charging temperature	0°C~55°C			
Discharge temperature	-20°C~60°C			
Environment	Indoor/outdoor under roof (avoid direct sunlight)			
Relative humidity	5%~95%			
Cooling	Natural convection			
Cell technology	Lithium-iron phosphate (LiFePO4)			
Protection Rating	IP65			
Life cycle	6000 times @80%DOD			
Certificates	CB, IEC62619, CE-EMC, CE-GPSD, UKCA, UL1973, UL9540A, EN62040, IEC62040; UN38.3, MSDS			
Single module Technical Specification				
Module	51.2V 100Ah, 5.12kWh			
Dimension (L*W*H)mm	High Voltage Box:610*225*250 Battery Box:610*225*250			
Weight(KG)	High Voltage Box:16 Battery Box:48.5			

*The actual product may have slight differences from some promotional videos or pictures. Please refer to the actual product. Unless otherwise specified the data on this page are all from our company's laboratory. The data may have errors due to changes in the objective environment.

*The specifications are subject to change without prior notice.